


# UF4001 THRU UF4007

## ULTRAFast EFFICIENT PLASTIC RECTIFIER

Reverse Voltage - 50 to 1000 Volts      Forward Current - 1.0 Ampere

### DO-204AL

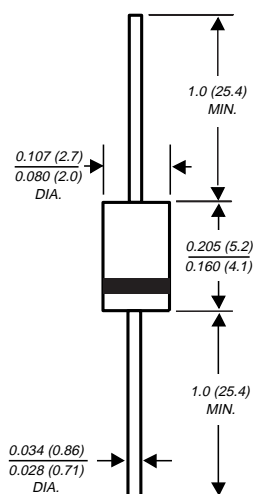

Dimensions in inches and (millimeters)

### FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ 1.0 ampere operation at  $T_A=55^\circ\text{C}$  with no thermal runaway
- ◆ Glass passivated chip junction
- ◆ Low cost
- ◆ Ultrafast recovery time for high efficiency
- ◆ Low forward voltage
- ◆ Low leakage current
- ◆ High surge current capability
- ◆ High temperature soldering guaranteed:  $250^\circ\text{C}/10$  seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension



### MECHANICAL DATA

**Case:** JEDEC DO-204AL molded plastic body over passivated chip

**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.012 ounce, 0.3 gram

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at  $25^\circ\text{C}$  ambient temperature unless otherwise specified.

	SYMBOLS	UF 4001	UF 4002	UF 4003	UF 4004	UF 4005	UF 4006	UF 4007	UNITS	
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts	
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts	
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts	
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=55^\circ\text{C}$	$I_{(AV)}$	1.0							Amp	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	30.0							Amps	
Maximum instantaneous forward voltage at 1.0A	$V_F$	1.0				1.7			Volts	
Maximum DC reverse current at rated DC blocking voltage	$I_R$	$T_A=25^\circ\text{C}$ 10.0				$T_A=100^\circ\text{C}$ 50.0				$\mu\text{A}$
Maximum reverse recovery time (NOTE 1)	$t_{rr}$	50.0				75.0			ns	
Typical junction capacitance (NOTE 2)	$C_J$	17.0							pF	
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$ $R_{\theta JL}$	60.0 15.0								$^\circ\text{C}/\text{W}$
Operating junction and storage temperature range	$T_J, T_{STG}$	-55 to +150							$^\circ\text{C}$	

#### NOTES:


(1) Reverse recovery test conditions:  $I_F=0.5\text{A}$ ,  $I_R=1.0\text{A}$ ,  $I_{rr}=0.25\text{A}$

(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts


(3) Thermal resistance from junction to ambient and from junction to lead length 0.375" (9.5mm), P.C.B. mounted

# RATINGS AND CHARACTERISTIC CURVES UF4001 THRU UF4007


**FIG. 1 - MAXIMUM FORWARD CURRENT DERATING CURVE**

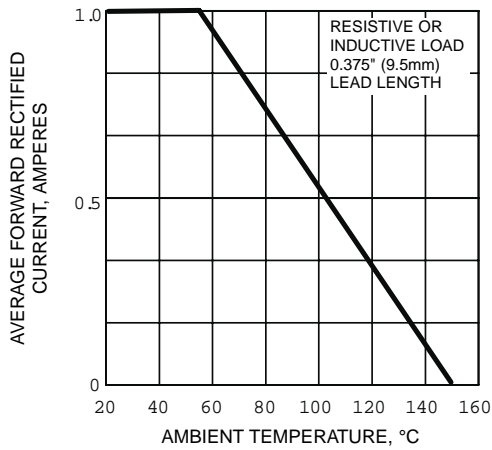


**FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

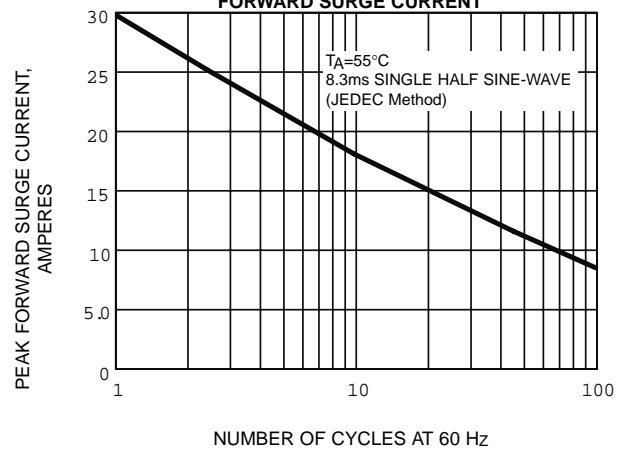


**FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

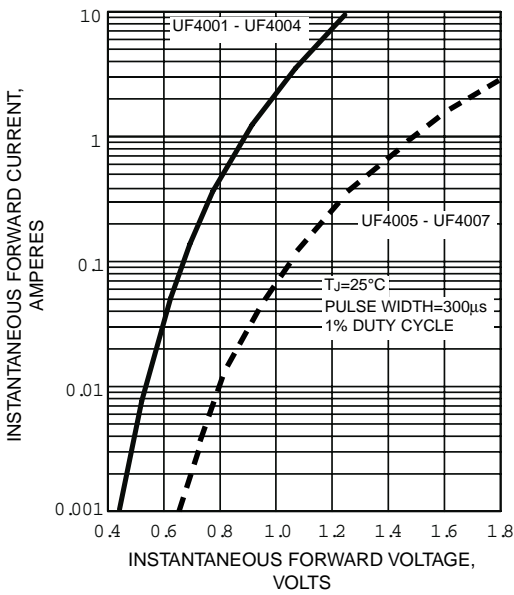

**FIG. 4 - TYPICAL REVERSE LEAKAGE CHARACTERISTICS**

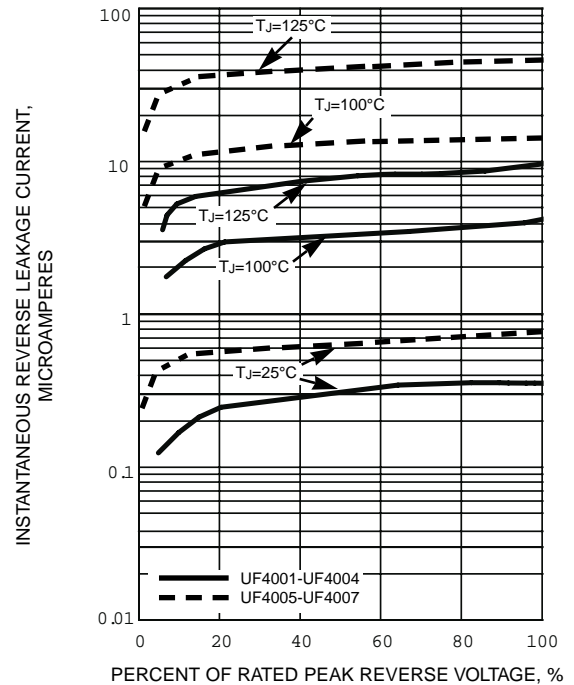

**FIG. 5 - TYPICAL JUNCTION CAPACITANCE**

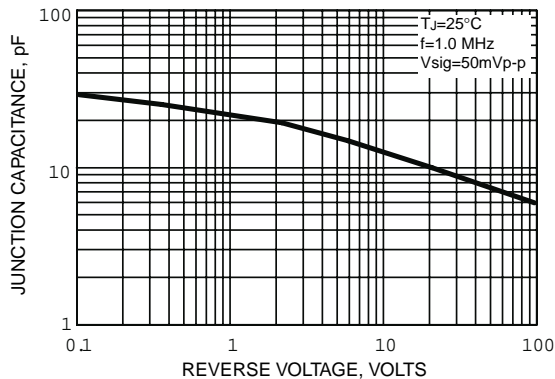

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.